

US Patent No. D872,924

10W dock light designed to replace up to 150W incandescent light head  
Sleek, compact design with durable plastic housing

Flexible arm and hinged bracket allow for improved aimability and enables fixture to swing away upon impact  
LED technology increases efficiency, eliminates maintenance and supports green initiatives



### Key Applications

Loading docks  
Warehouses

### Compliances

ETL/cETL Listed to:

- UL 1598 Suitable for Damp Locations
- CSA C22.2 No. 250.0

CE  
IK08  
LM79 report available  
Buy American Act (BAA)

### Specifications

Construction	Thermally conductive plastic housing
Hardware	304 stainless steel
Arm	Flexible tubing
Lens	Impact resistant Clear polycarbonate
Light source	Lumileds Luxeon light emitting diodes (LED) Up to 1100 lumens (10W) CRI > 70 CCT 4000K 20° beam pattern 50,000 hour rated life 100-277V (pigtail) or 120V only (with NEMA 5-15 plug)
Power source	Bi-level dimming standard
Wiring	72.00 inch (1829 mm) cord with three-prong plug (NEMA 5-15) (standard on 120V only) 72.00 inch (1829 mm) cord with pigtail (100-277V option) 3x5 inch zinc plated steel bracket
Mounting	
Ambient operating temperature	-40°C to +40°C
e	7.0 lb (3.2 kg)
Weight	3 years

Warranty


For IES files, see website or contact factory




This product complies with domestic preference requirements such as BAA or TAA. For additional information, visit [phoenixlighting.com](http://phoenixlighting.com)



## Dimensions

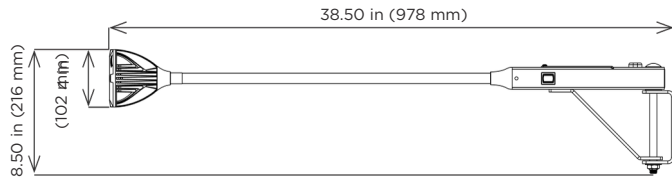

### Mounting Plate



## Ordering Information

Example: DL-FLEX-120

Fixture	Wattage/Type	Voltage
DL	FLEX	120 1
		100-277 2

Fixture	Wattage	Voltage
DL Docklite	FLEX	120 1    120V, 50/60Hz 120-277 2    120-277V, 50/60Hz

### Notes

- 1 120V fixture comes standard with three-prong plug (NEMA 5-15)
- 2 100-277V fixture will come standard with pigtail

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

